



# SJ-H

*Large LCD and fast response speed provide effective weighing for a wide range of applications*



*SJ-1000H  
SJ-2000H  
SJ-5000H  
SJ-12KH*



**A&D** ...Clearly a Better Value  
A&D Company, Limited  
<http://www.aandd.jp>

**Food service, Stores, Post offices, Industries, Factories, Schools, Laboratories, Warehouses, Offices, Home use and a wide range of other diverse weighing applications are possible.**

■ **High resolution**  
(SJ-5000H: 1/2500, SJ-12KH: 1/2400, SJ-1000H/2000H: 1/2000)

■ **Fast stability time – Less than 1 second**



■ **Large wide LCD display (25mm height)**

■ **Durable body**

■ **Large weighing pan 230mm x 190mm**



■ **Full digital calibration function**

■ **Multiple weighing units – g, lb, oz and lb-oz**



■ **Battery operation with 4 x D size dry batteries**

■ **Simple and easy to change the batteries**

■ **Optional AC adapter**



■ **Automatic power OFF function**

■ **Spirit level and adjustable feet for accurate weighing**


■ **Status indication function – Battery, Stable, Zero and Net**

## SJ-H Specifications

		SJ-1000H	SJ-2000H	SJ-5000H	SJ-12KH
Capacity x Resolution	g	1000g x 0.5g	2000g x 1g	5000g x 2g	12kg x 0.005kg
	lb	2.2lb x 0.001lb	4.4lb x 0.002lb	11lb x 0.005lb	26lb x 0.01lb
	oz	35oz x 0.02oz	70oz x 0.05oz	176oz x 0.1oz	423oz x 0.2oz
	lb-oz	2.2lb x 0.1 oz	4.4lb x 0.1 oz	11lb x 0.1oz	26lb x 1 oz
Linearity		±1g	±2g	±5g	±10g
Repeatability (S.D.)		1g	2g	5g	10g
Span drift		±0.015% / °C TYP ( 5°C~35°C/ 41°F~95°F)			
Display		Liquid Crystal Display , 25mm / 0.98 inches			
Operating temperature		-10°C~40°C / 14°F~104°F, less than 85% RH (No condensation)			
Display update		Approx. 10 times per second			
Power		4 x R20P / LR20 / "D" size batteries or AC adapter			
Battery life		Approx. 800 hours with alkaline cells at 20°C / 68°F			
Pan size		230 (W) x 190 (D) mm / 9.05 (W) x 7.48 (D) inches			
Dimensions		265 (W) x 250 (D) x 103 (H) mm / 10.4 (W) x 9.8 (D) x 4.1 (H) inches			
Weight		Approx. 1.9kg / 4.2lb			
Calibration mass		1000g	2000g	5000g	10kg

Specifications subject to change for improvement without notice

## External Dimensions (mm / inches)

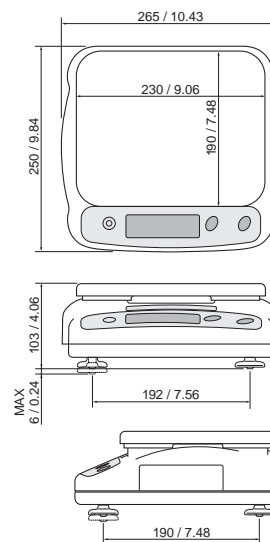

## Accessories

<b>AX-TB164B</b>	AC adapter	AC 230V "C" type plug
<b>AX-TB173A</b>	AC adapter	AC 230V "BF" plug
<b>AX-TB196</b>	AC adapter	AC 100 "A" type plug
<b>AX-TB202</b>	AC adapter	AC 120 "A" type plug

**A&D** ...Clearly a Better Value

### A&D Company, Limited

3-23-14 Higashi-Ikebukuro, Toshima-ku, Tokyo 170-0013 JAPAN  
Telephone: [81](3) 5391-6132 Fax: [81](3) 5391-6148  
http://www.aandd.jp

### A&D ENGINEERING, INC.

1555 McCandless Drive, Milpitas, CA. 95035 U.S.A.  
Telephone: [1](408) 263-5333 Fax: [1](408) 263-0119

### A&D MERCURY PTY. LTD.

32 Dew Street, Thebarton, South Australia 5031 AUSTRALIA  
Telephone: [61](8) 8301-8100 Fax: [61](8) 8352-7409

### A&D INSTRUMENTS LTD.

Unit 24/26 Blacklands Way Abingdon Business Park,  
Abingdon, Oxon OX14 1DY United Kingdom  
Telephone: [44](1235) 550420 Fax: [44](1235) 550485

### <German Sales Office>

Große Straße 13 b 22926 Ahrensburg GERMANY  
Telephone: [49](0) 4102 459230 Fax: [49](0) 4102 459231

### A&D KOREA Limited

Manhattan Bldg. 8F, 36-2 Yoido-dong, Youngdeungpo-gu, Seoul, KOREA  
Telephone: [82](2) 780-4101 Fax: [82](2) 782-4280

### A&D RUS CO. LTD.

Korp.134A, D.29, UL. Vereiskaya, Moscow, 121357  
RUSSIAN FEDERATION  
Telephone: [7] (495) 727-4455 Fax: [7] (495) 727-4456